


# Plugable Inductors



**Series**

High Inductance (Type **07**) Magnetic Shielded Coil

# 07M

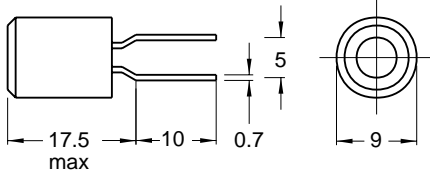

Ordering Code	L (mH)	f <sub>L</sub> (MHz)	Tol %	Q min	f <sub>α</sub> (MHz)	DC Res (Ω)	Rated DC Current (mA)	Material
07M-102K-50	1.0	0.02	±10	70	0.796	3.4	90	Ferrite
07M-122K-50	1.2				3.7	75		
07M-152K-50	1.5				4.0	70		
07M-182K-50	1.8				4.5	65		
07M-222K-50	2.2				5.2	60		
07M-272K-50	2.7				5.8	55		
07M-332K-50	3.3				0.252	6.1	50	
07M-392K-50	3.9					7.2	45	
07M-472K-50	4.7					7.5	40	
07M-562K-50	5.6					8.4	40	
07M-682K-50	6.8			9.7		35		
07M-822K-50	8.2			10.4		30		
07M-103K-50	10			0.079		12.1	25	
07M-123K-50	12					13.0	25	
07M-153K-50	15					15.0	25	
07M-183K-50	18					17.0	22	
07M-223K-50	22				19.5	21		
07M-273K-50	27				22.0	18		
07M-333K-50	33				26.0	17		
07M-393K-50	39				45.0	15		
07M-473K-50	47	52.0	13					
07M-563K-50	56	58.0	12					
07M-683K-50	68	66.0	12					
07M-823K-50	82	71.0	10					

Only available in loose packing