



Plugable Inductors

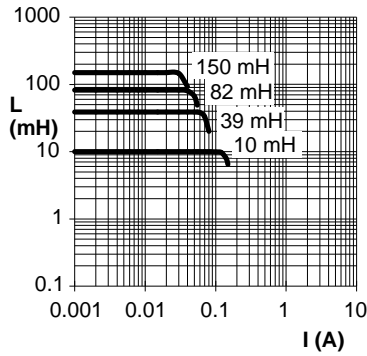

Series

RF (Type 11) Plugable Coil **11P**

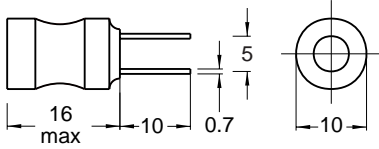

Delivery Form Code:

50 - loose packing

Ordering Code	L (μ H)	f_L (MHz)	Tol %	Q min	f_q (MHz)	SRF min (MHz)	DC Res max (W)	Rated DC Current (mA)	Material
11P-103J-50	10000	0.02	± 5	50	0.079	0.35	23	110	Ferrite
11P-123J-50	12000					0.32	24	100	
11P-153J-50	15000					0.29	28	90	
11P-183J-50	18000					0.28	34	85	
11P-223J-50	22000					0.25	39	80	
11P-273J-50	27000					0.21	48	70	
11P-333J-50	33000					0.20	56	65	
11P-393J-50	39000					0.19	62	60	
11P-473J-50	47000					0.18	73	55	
11P-563J-50	56000					0.14	115	50	
11P-683J-50	68000					0.13	120	50	
11P-823J-50	82000				0.12	150	45		
11P-104J-50	100000				0.025	0.11	155	40	
11P-154J-50	150000					0.08	205	35	